

# NB60/230

## LED Visual Alarm device

The NB60/230 strobe provides a high efficiency, low power, high output solution for alarm signalling when visual alarm signals are required.

With a quick fix installation method in the base, this unit is quick to install to reduce the cost of installation.

The high quality and robust design ensures that the user has trouble free operation over the life of the product, even in tough environments.

With the robust design and materials used, the NB60/230 is suitable for a wide range of applications, including in harsh environments while still maintaining an elegant design for the most prestigious applications.



### Key Features

Quick installation  
Horizontal and diagonal fixings

High output LED technology  
High efficiency  
Attractive design

IP65 rated with wall gasket  
Lockable with Allen bolt  
Robust design

### Applications

Offices, Retail outlets, Hospitals, Universities, Commercial, Industrial sites and ships and safe area Maritime.

Where visual alarms are required.

Where low power consumption is required with a high light output

### Key Benefits

Ease of installation reduces costs where multiple VAD are required.

High efficiency circuitry and LED technology reduces overall costs with high reliability and product life.


Robust housing reduces failures due to external and mechanical damage.

# Product data

## Specification

	Operating range	
Supply voltage range	120 ~ 240V AC 50~60Hz	
Current consumption	10mA to 20mA	
Power consumption	3.5W          Max. 4.8W	
Cable monitoring	N/A	
Terminal size	Flying leads provided	
LED Configuration	White LED's	
Mounting	Wall	
EN54 –23 coverage	N/A	
EN54 –23 coverage volume	N/A	
Sound Output	N/A	
32 selectable tones	N/A	
Volume control	N/A	
Flash options	High and low output, 1s and 2s flash rates DIL switch selectable	
Material	V0 rated ABS body & base, V0 Polycarbonate lens	
Weight	226g Deep base :146g Shallow base	
Base colour	White or Red	
Lens colour	Clear	
Fixing method	Body to base – Bayonet auto connect, Base to wall - Screw	
Operating temperature	-25°C to +75°C	
IP Rating	IP65	

## Dimensions

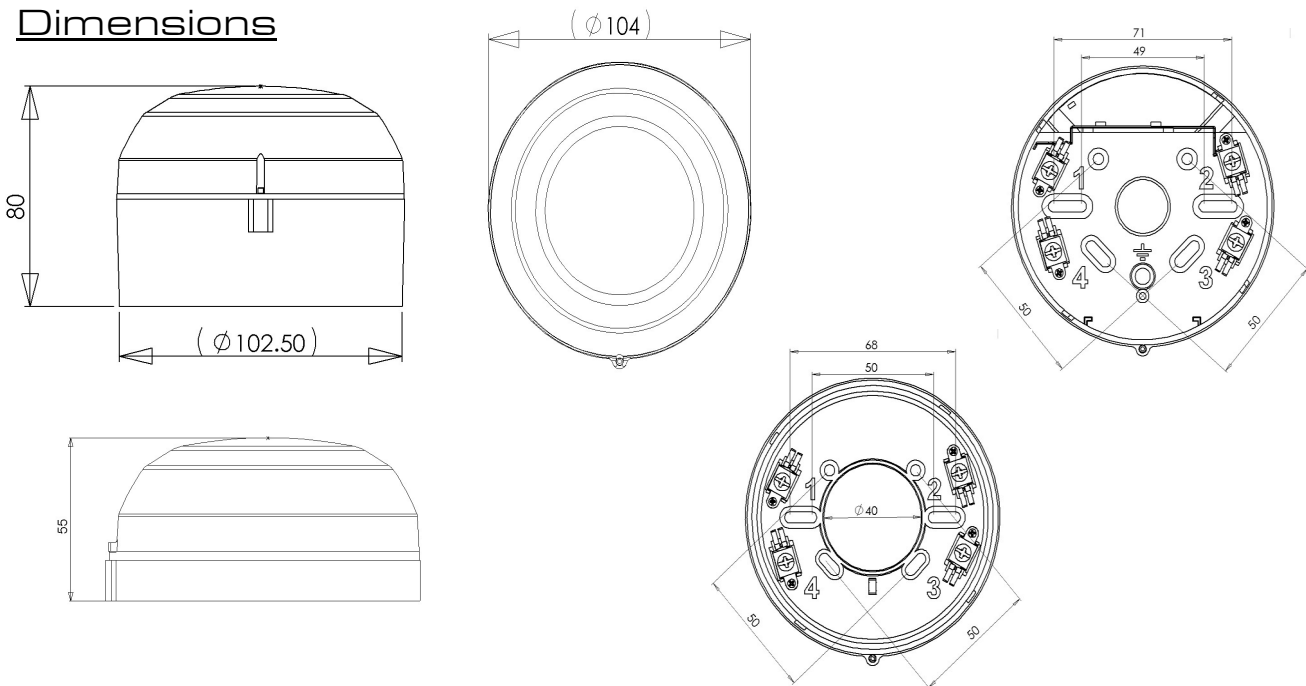

## Order codes

NB60/230/CL/SW          LED Strobe with white flash and white shallow base  
 NB60/230/CL/SD          LED Strobe with white flash and white deep base

Other flash colour and base types available, contact us for details.